

Engine
Net Power
Operating Weight
with Canopy / Cab
Bucket Capacity

Yanmar 3TNV88F-ESLY Stage V 17.3 kW (23.2 hp/ 23.5 ps) @ 2,200 rpm

3,860 kg / 3,980 kg (8,510 lb / 8,774 lb)

0.11 m³ (0.14 yd³)

9035E EXCAVATOR

UNBEATABLE RETURN ON YOUR INVESTMENT

LiuGong 9035E, **Zero Tail Swing excavator**, designed to maximize your productivity while offering a clear line of sight within a confined work space.

POWERFUL ENGINE

Unmatched performance driven by the Yanmar 3TNV88F-ESLY Stage V engine.

ADVANCED HYDRAULICS

Advanced hydraulic system is perfectly matched to the engine and components for fast response and smooth operation. Load sensing and flow sharing provide operational precision, efficient performance and greater controllability.

BOOM SWING

Controlled by the thumb switch on right hand joystick, provides greater control of boom swing and the operator with more floor space.

DOZER BLADE CONTROL

Our proportional 2-way action dozer function with standard blade float allows easy backfilling when in reverse travel.





ZERO TAIL SWING

The 9035E, zero tail swing, increases operator visibility and productivity when working in confined spaces where the upper body stays entirely within the width of the undercarriage.

OPERATOR FRIENDLY ENVIRONMENT

Ergonomically designed controls, clear and informative displays, increased visibility, and exceptional comfort increases operator efficiency and safety.

PARTS

Using genuine LiuGong parts is key to keeping your costs low and your machine in top working order. Our extensive support network is always there when you need it, to maximize your business profitability.

AFTER SALES SERVICE

As a customer of LiuGong you can feel confident that our dealers and regional offices will be there to support you with training, service and maintenance needed throughout the life of your machine.

HYDRAULIC COUPLER

Switching attachments like buckets, breakers and shears can be time consuming and hazardous. We've made it fast, safe and simple with LiuGong's quick coupler which is perfectly matched to a range of genuine LiuGong attachments.



DESIGNED TO GET MORE DONE

The 9035E is designed to **get more done** in less time. Featuring a stronger boom, arm and bucket breakout force, greater hydraulic flow, higher swing speeds and improved cycle times, this excavator will power **through any task** in any terrain.

POWERFUL PERFORMANCE

The Yanmar fuel efficient 3TNV88F-ESLY delivers gross power of 18.2 kW (24.4 hp) and torque of 94.2 N·m (69.5 lb·ft).

LOAD SENSING HYDRAULICS


Load-sensing hydraulics direct the engine's power to ensure the hydraulic pump flow continually adjusts for smooth, quick and efficient operation. The pilot valves match up with the main control valve to offer more precise control.

OPERATOR FRIENDLY ENVIRONMENT

Ergonomically designed controls, large entrance, spacious interior designed for operator comfort and efficiency.





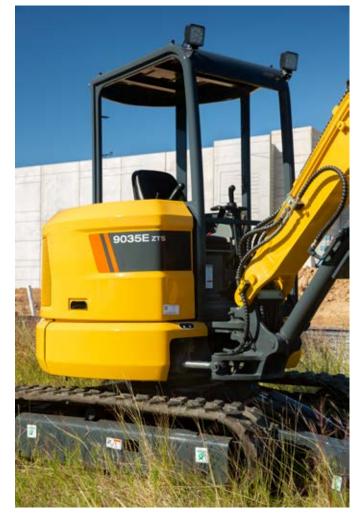





EFFICIENCY, PRECISION & VERSATILITY

LiuGong E-Series excavators deliver the **perfect balance** of performance, precision, and quality. The 9035E model is powered by the latest generation, low emission Yanmar 3TNV88F-ESLY engine. Our first ZTS, zero tail swing, powerful output, environmentally friendly with excellent **visibility** and fast cycle times.

A POWERFUL ENGINE

Yanmar 3TNV88F-ESLY engine meets strict EU Stage V emissions standards superior power to weight ratio, quiet, reliable designed to be environmentally friendly, fuel efficient with the capability of running on up to 5 percent B5 Bio Diesel.

SAFETY STANDARDS

All LiuGong E-Series excavators come with certified ROPS (Rollover Protective System) cabs meeting ISO safety standards. LiuGong offers FOPS (Falling Object Protective Structure) as an option on all E-Series excavators.

ALL AROUND VISION FEATURES

Designed to offer optimized visibility with flat glass with a panoramic view and well position controls with plenty of head and legroom, gives the operator greater control of the machine when working in confined spaces. Each feature has been designed to keep you working with great comfort.







ALL AROUND COMFORT

In the 9035E cab, you're working in complete **comfort** with outstanding **visibility** all around. We understand how operators like to work and have designed the cab for maximum comfort and ultimate **productivity**.

AT HOME IN THE CAB

The 9035E series ROPS certified cab is ISO 12117-2 certified mounted on dampener silicone to absorb noise and vibration. Wide spacious cab door swings full open to lock position. Front windshield slides up into celling, removable lower window, large right sliding glass offers greater cab ventilation.

ADVANCED CLIMATE CONTROL

Pressurized cab, advanced climate control, air is circulated through the cab by three outlets to improve air circulation and front windshield defrost allows year round operator comfort in any environment.

IMPROVED JOYSTICK CONTROLS

Operator can now control both the boom offset and hammer shear functions without moving hands from joysticks.



ALWAYS STRONG ALWAYS RELIABLE

The use of thick, high-tensile steel components, internal baffling, and stress-relieved plates, make the structures on LiuGong E-Series excavators tough and durable.

We guarantee the **quality and reliability** of our machines throughout the manufacturing process by conducting stringent tests and ultrasound inspections that detect defects well before they make it into production.

BOOM & ARM

The boom and arm structures are designed with large cross-sectional supports and incorporates one-piece steel castings. This solid engineering guarantees long-term durability and high resistance to bending and torsional stress.

UPPER STRUCTURE

The upper structure is strongly reinforced by the use of an H-beam in the high cross section of the main structure providing even weight distribution and increasing stability.



UNDERCARRIAGE

The high-strength undercarriage of the 9035E incorporates a welded X-frame construction for long life durability and is designed to perform in the most challenging applications.

The standard rubber track lets you work on multiple surfaces such as asphalt, concrete, and grass without damaging the surface or machine.





PART OF YOUR PERFORMANCE

LiuGong engineering sets high standards and all parts are rigorously tested to ensure they can meet the rigid quality specifications required for long lasting performance. No matter where you are in the world, we can ensure fast and efficient parts support to keep you going.



We know that confidence in your machine and those who support it is essential. At LiuGong North America, we make sure we can always get what you need without delay, via our global parts depot, and the support of our dealer network.

READY FOR ANY JOB

LiuGong provides a range of purpose designed attachments, hitches and tools for your 9035E to give you increased versatility for any jobsite.



9

SPECIFICATIONS

Operating weight

with cab 3,980 kg (8,774 lb) with canopy 3,860 kg (8,510 lb)

Operating weight includes coolant, lubricants, full fuel tank, cab/canopy, standard rubber track, boom, arm, bucket, blade dozer and an operator of 75 kg (165 lb).

Bucket capacity 0.11 m³ (0.14 yd³)

ENGINE

Description

Yanmar EPA Tier 4 final / EU Stage V, 1.64 liter, 3-cylinder, 4 stroke direct injection diesel engine.

| Emission rating | EPA Tier 4 final / EU Stage V | |
|--------------------------------------|--------------------------------------|--|
| Engine manufacturer | Yanmar | |
| Engine model | 3TNV88F-ESLY | |
| Aspiration | Natural | |
| Charged air cooling | Aftercooler | |
| Cooling fan drive | Belt drive | |
| Displacement | 1.64 L (100 in³) | |
| Rated speed | 2,200 rpm | |
| Net power (SAE J1349/ISO 9249) | 17.3 kW (23.2 hp/23.5 ps) | |
| Gross power (SAE J1995/ISO 14396) | 18.2 kW (24.4 hp/24.7 ps) | |
| Maximum torque | 94.2 N·m (69.5 lbf·ft) @1,320 rpm | |
| Bore × Stroke | 88 x 90 mm (3.46 x 3.54 in) | |

DRIVE AND BRAKES

Description

2-speed drive motors allow auto speed shifting. Each motor is equipped with a hydraulic released, spring applied parking brake.

| Max. travel speed | High: 4.6 km/h (2.8 mph) | |
|-------------------|--------------------------|--|
| | Low: 2.7 km/h (1.7 mph) | |
| Gradeability | 30°/58% | |
| Max. drawbar pull | 33 kN (7,419 lbf) | |

SWING SYSTEM

Description

Planetary gear reduction driven by high torque axial piston motor with spring applied parking brake; Hydraulic oil lubricate.

| Swing speed | 10.0 rpm |
|--------------|--------------------------|
| Swing torque | 8,009 N·m (5,907 lbf·ft) |

HYDRAULIC SYSTEM

Main pump

| | displacement piston pump |
|-------------|--------------------------|
| Marrian fla | 92.4 L/min |

(24.4 gal/min)

Pilot pump

Maximum flow

| Type | Gear pump | |
|--------------|----------------------------|--|
| Maximum flow | 8.8 L/min (2.3 gal/min) | |

Relief valve setting

| Implement | 24.5 MPa (3,553 psi) |
|----------------|----------------------|
| Travel circuit | 24.5 MPa (3,553 psi) |
| Slew circuit | 18.6 MPa (2,698 psi) |
| Pilot circuit | 3.9 MPa (566 psi) |
| | _ |

Hydraulic cylinders

| Boom Cylinder – | Φ80 × 510 mm |
|------------------------------------|--|
| Bore × Stroke | (Φ3.1 in × 1 ft 8 in) |
| Arm Cylinder – | Φ80 × 590 mm |
| Bore × Stroke | (Φ3.1 in × 1 ft 11 in) |
| Bucket Cylinder – Bore × Stroke | Φ 70 × 465 mm (Φ 2.75 in × 1 ft 6 in) |
| Dozer Cylinder – | Φ100 ×142 mm |

Swing Cylinder – $\Phi 80 \times 400 \text{ mm}$ Bore × Stroke (3.1 in × 1 ft 4 in)

| ELECTRIC SYSTEM | |
|-----------------|----------------------------------|
| System Voltage | 12 V |
| Battery | 12 V |
| Alternator | 12 V - 55 A |
| Start motor | 12 V - 1.7 kW (12 V - 2.3 hp) |

SERVICE CAPACITIES

| Fuel tank | 40 L (10.6 gal) |
|---------------------|-------------------|
| Engine oil | 6.7 L (1.77 gal) |
| Final drive (each) | 0.5 L (0.13 gal) |
| Cooling system | 7.0 L (1.85 gal) |
| Hydraulic reservoir | 42.0 L (11.1 gal) |
| Hydraulic system | 70.0 L (18.5 gal) |


SOUND PERFORMANCE


| Interior Sound Power Level (ISO 6396) | 79 dB(A) |
|--|----------|
| Exterior Sound Power Level (ISO 6395) | 93 dB(A) |
| , | |

UNDERCARRIAGE

| Track shoe each side | 45 |
|-------------------------------|-----------------|
| Link pitch | 101.6 mm (4 in) |
| Shoe width, triple grouser | 300 mm (12 in) |
| Bottom rollers each side | 4 |
| Top rollers each side | 1 |
| | |

SPECIFICATIONS

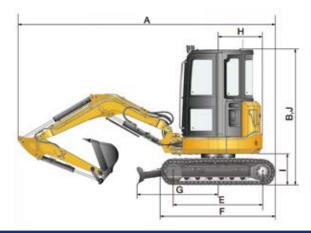



| DIMENSIONS | | |
|---|---------------------------------|-------------------|
| Boom | 2,450 mm (8') | |
| Arm Options | 1,320 mm (4'4") 1,700 mm (5'7") | |
| A Shipping Length | 4,810 mm (15'9") | 4,860 mm (15'11") |
| B Shipping Height – Top of Cab | 2,500 mm (8'2') | |
| C Track Gauge | 1,400 mm (4'7") | |
| D Undercarriage Width – with 300 mm Shoes | 1,700 mm (5'7") | |
| E Length to Center of Rollers | 1,675 mm (5'6") | |
| F Track Length | 2,100 mm (6'11") | |
| G Length from Blade to Swing Center | 1,600 mm (5'3") | |
| H Tail Swing Radius | 850 mm (2'9") | |
| I Counterweight Ground Clearance | 580 mm (1'11") | |
| J Overall Height of Cab | 2,500 mm (8'2") | |
| K Min. Ground Clearance | 258 mm (10") | |
| L Track Shoe Width | 300 mm (12") | |

| BOOM DIMENSIONS | | | | | | | |
|-----------------------|--|--|--|--|--|--|--|
| 2,450 mm (8') | | | | | | | |
| 2,548 mm (8'4") | | | | | | | |
| 806 mm (2'8") | | | | | | | |
| 273 mm (11") | | | | | | | |
| (with boom hinge pin) | | | | | | | |
| 142 kg (313 lbs) | | | | | | | |
| | | | | | | | |

Only boom.

| ARM DIMENSIONS | | | | | | | | |
|----------------|-----------------|------------------|--|--|--|--|--|--|
| Arm | 1,320 mm (4'4") | 1,700 mm (5'7") | | | | | | |
| Length | 1,706 mm (5'7") | 2,100 mm (6'11") | | | | | | |
| Height | 392 mm (1'3") | 392 mm (1'3") | | | | | | |
| Width | 145 mm (5.7") | 145 mm (5.7") | | | | | | |
| Weight | 78 kg (172 lbs) | 97 kg (214 lbs) | | | | | | |

Only arm.


| BUCKET SELECTION GUIDE | | | | | | | | | |
|------------------------|--------------------|---------------|------------------|-----------|-------------------|------------------|--|--|--|
| 2.45 m (8') HD Boo | | | | | | | | | |
| Bucket type | Capacity | Cutting width | Weight | Teeth pcs | 1.32 m (4'4") Arm | 1.7 m (5'7") Arm | | | |
| General purpose | 0.11 m³ (0.14 yd³) | 610 mm (2') | 101 kg (223 lbs) | 4 | В | NA | | | |
| General purpose | 0.07 m³ (0.09 yd³) | 458 mm (1'6") | 82 kg (181 lbs) | 4 | В | В | | | |

The recommendations are given as a guide only, based on typical operation conditions. Bucket capacity based on ISO 7451, heaped material with a 1:1 angle of repose.

- A 1,200 1,300 kg/m³ (2,023 2,191 lb/yd³): Coal, Caliche, Shale B 1,400 1,600 kg/m³ (2,360 2,697 lb/yd³): Wet earth and clay, limestone, sandstone C 1,700 1,800 kg/m³ (2,865 3,034 lb/yd³): Granite, wet sand, well blasted rock D 1,900 kg/m³ (3,203 lb/yd³): Wet mud, Iron ore NA. Not applicable

| MACHINE WEIGHTS AND GROUND PRESSURE | | | | | | | | | |
|-------------------------------------|------------------------------|---|----------------------------------|--|--|--|--|--|--|
| | Operating weight | Ground pressure | Overall width | | | | | | |
| Shoe width | 2,450 mm (8') boom, 1,320 mm | 2,450 mm (8') boom, 1,320 mm (4'3") arm, 0.11 m³ (0.14 yd³) bucket, 560 kg (1,235 lbs) counterweight; | | | | | | | |
| | 2,450 mm (8') boom, 1,700 mm | (5'7") arm, 0.07 m³ (0.09 yd³) bucket, 56 | 60 kg (1,235 lbs) counterweight; | | | | | | |
| 300 mm (12", Canopy) | 3,980 kg (8,774 lbs) | 35 kPa (5.1 psi) | 1,675 mm (5'6") | | | | | | |
| 300 mm (12", Cab) | 3,860 kg (8,510 lbs) | 34 kPa (4.9 psi) | 1,675 mm (5'6") | | | | | | |

SPECIFICATIONS

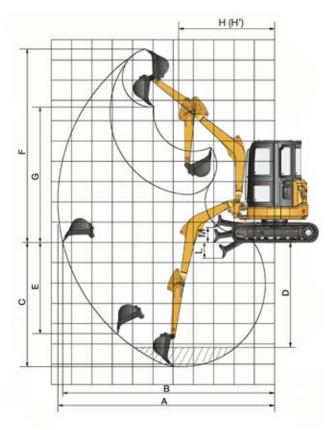

| WORKING RANGE | | |
|---|--------------------|---|
| Boom | 2,450 | mm (8') |
| Arm Options | 1,320 mm (4'4") | 1,700 mm (5'7") |
| A. Max. digging reach | 5,385 mm (17'8") | 5,715 mm (18'9") |
| B. Max. digging reach on ground | 5,270 mm (17'3") | 5,603 mm (18'5") |
| C. Max. digging depth | 3,085 mm (10'1") | 3,440 mm (11'3") |
| D. Max. digging depth 2.44 m (8') level | 2,610 mm (8'7") | 3,019 mm (9"11") |
| E. Max. vertical wall digging depth | 2,503 mm (8'3") | 2,713 mm (8'11") |
| F. Max. cutting height | 4,710 mm (15'5") | 4,843 mm (15'11") |
| G. Max. dumping height | 3,310 mm (10'10") | 3,463 mm (11'4") |
| H. Min. front swing radius | 2,416 mm (7'11") | 2,416 mm (7'11") |
| L. Dozer-Down | 390 mm (1'3") | 390 mm (1'3") |
| M. Dozer-Up | 370 mm (1'3") | 370 mm (1'3") |
| Bucket Digging Force (ISO) | 30 kN (6,744 lbf) | 30 kN (6,744 lbf) |
| Arm Digging Force (ISO) | 20 kN (4,496 lbf) | 17.8 kN (4,002 lbf) |
| Bucket Capacity | 0.11 m³ (0.14 yd³) | 0.07 m ³ (0.09 yd ³) |
| Bucket Tip Radius | 725 mm (2'5") | 725 mm (2'5") |

Lifting capacity at the arm end without bucket. For lifting capacity including bucket, weight of the bucket or the bucket with quick coupler must be deducted from the lifting capacities.

Lifting capacities are based on the machine standing on a firm, uniform supporting surface.







Rating over - side (Cs)

- Do not attempt to lift or hold any load that is greater than these rated values at their specified load radius and height. Weight of all accessories must be deducted from the above lifting capacities.
- The rated loads are in compliance with ISO 10567 Hydraulic Excavator Lift Capacity Rating Standard. They do not exceed 87% of hydraulic lifting capacity or 75% tipping load.
- 3. Ratings at bucket lift hook.

- 4. Lifting capacities are based on machine standing on level, firm and uniform ground.
- *Indicates the load is limited by hydraulic capacity rather than tipping capacity.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine and rules for the safe operation of equipment should be adhered to at all times.

LIFTING CAPACITY (METRIC)

9035EZTS with 300 mm shoes, 1,320 mm arm (Standard)

- Reach from swing center Bucket hook height

- A: Reach Hook heig C: Lifting capacity Cf: Rating over front Cs: Rating over side

Conditions

Boom length: 2,450 mm one-piece boom Arm length: 1,320 mm Bucket: 0.11 m³ Shoes: 300 mm

Ùnit: kg



| | Blade: Down A (Unit: m) | | | | | | | | | | |
|-------|-------------------------|-------|--------|-----|------|-----|------|-----------|-------|--|--|
| | | | | | | | | | | | |
| B (m) | 2 | 2 | 3 | | 4 | 4 | | MAX REACH | | | |
| | Cf | Cs | Cf | Cs | Cf | Cs | Cf | Cs | A (m) | | |
| 3 | | | | | *650 | 490 | *660 | 450 | 4.2 | | |
| 2 | | | *840 | 780 | *700 | 480 | *670 | 370 | 4.6 | | |
| 1 | | | *1,200 | 720 | *820 | 460 | *690 | 340 | 4.7 | | |
| 0 | *1,730 | 1,270 | *1,390 | 680 | *900 | 440 | *720 | 340 | 4.6 | | |
| - 1 | *2,400 | 1,290 | *1,330 | 670 | *830 | 440 | *750 | 410 | 4.2 | | |

| | Blade: Up | | | | | | | | | |
|-------|-----------|-------|------|------|---------|-----|-----|-----------|-------|--|
| | | | | A (U | nit: m) | | | | | |
| D (m) | 2 | 2 | : | 3 | | 4 | | MAX REACH | | |
| B (m) | Cf | Cs | Cf | Cs | Cf | Cs | Cf | Cs | A (m) | |
| 3 | | | | | 630 | 490 | 580 | 450 | 4.2 | |
| 2 | | | *840 | 780 | 620 | 480 | 490 | 370 | 4.6 | |
| 1 | | | 950 | 720 | 600 | 460 | 460 | 340 | 4.7 | |
| 0 | *1,730 | 1,270 | 910 | 680 | 580 | 440 | 460 | 340 | 4.6 | |
| - 1 | 1,780 | 1,290 | 900 | 670 | 580 | 440 | 550 | 410 | 4.2 | |

9035EZTS with 300 mm shoes, 1,700 mm arm

- Reach from swing center Bucket hook height
- Lifting capacity
- Rating over front Rating over side

Conditions

Boom length: 2,450 mm one-piece boom Arm length: 1,700 mm Bucket: 0.07 m³ Shoes: 300 mm



| | | | Blade | e: Down | | | | | | |
|-------------|------------------|------------------------------|---|--|--|---|--|---|--|--|
| A (Unit: m) | | | | | | | | | | |
| 2 | <u> </u> | 3 | i . | 4 | 4 | | MAX REACH | | | |
| Cf | Cs | Cf | Cs | Cf | Cs | Cf | Cs | A (m) | | |
| | | | | *507 | 493 | *532 | 414 | 4.4 | | |
| | | | | *590 | 479 | *567 | 341 | 4.8 | | |
| *2,310 | 1,363 | *1,048 | 724 | *737 | 454 | *613 | 315 | 4.9 | | |
| *2,902 | 1,267 | *1,343 | 675 | *858 | 431 | *671 | 322 | 4.8 | | |
| *2,685 | 1,266 | *1,375 | 659 | *865 | 422 | *743 | 370 | 4.4 | | |
| | *2,310 *2,902 | *2,310 1,363 *2,902 1,267 | Cf Cs Cf *2,310 1,363 *1,048 *2,902 1,267 *1,343 | A (U 2 3 Cf Cs Cf Cs *2,310 1,363 *1,048 724 *2,902 1,267 *1,343 675 | A (Unit: m) Z 3 4 Cf Cs Cf Cs Cf *507 *590 *2,310 1,363 *1,048 724 *737 *2,902 1,267 *1,343 675 *858 | A (Unit: m) Z 3 4 Cf Cs Cf Cs *507 493 *590 479 *2,310 1,363 *1,048 724 *737 454 *2,902 1,267 *1,343 675 *858 431 | A (Unit: m) Z 3 4 Cf Cs Cf Cs Cf *507 493 *532 *590 479 *567 *2,310 1,363 *1,048 724 *737 454 *613 *2,902 1,267 *1,343 675 *858 431 *671 | Z 3 4 MAX REACH Cf Cs Cf Cs Cf Cs *507 493 *532 414 *590 479 *567 341 *2,310 1,363 *1,048 724 *737 454 *613 315 *2,902 1,267 *1,343 675 *858 431 *671 322 | | |

| Blade: Up | | | | | | | | | | |
|-----------|-------|-------|-----|------|---------|-----|------|-----------|-------|--|
| | | | | A (U | nit: m) | | | | | |
| D () | 2 | 2 | 3 | 3 | 4 | 1 | | MAX REACH | | |
| B (m) | Cf | Cs | Cf | Cs | Cf | Cs | Cf | Cs | A (m) | |
| 3 | | | | | *507 | 493 | *532 | 414 | 4.4 | |
| 2 | | | | | *590 | 479 | 458 | 341 | 4.8 | |
| 1 | 1,886 | 1,363 | 964 | 724 | 606 | 454 | 428 | 315 | 4.9 | |
| 0 | 1,779 | 1,267 | 912 | 675 | 582 | 431 | 439 | 322 | 4.8 | |
| - 1 | 1,777 | 1,266 | 895 | 659 | 573 | 422 | 504 | 370 | 4.4 | |

Lifting capacity at the arm end without bucket. For lifting capacity including bucket, weight of the bucket or the bucket with quick coupler must be deducted from the lifting capacities.

Lifting capacities are based on the machine standing on a firm, uniform supporting surface.





Rating over - front (Cf)

Rating over - side (Cs)

- Do not attempt to lift or hold any load that is greater than these rated values at their specified load radius and height. Weight of all accessories must be deducted from the above lifting capacities.
- The loads are in compliance with ISO 10567
 Hydraulic Excavator Lift Capacity Rating
 Standard. They do not exceed 87% of hydraulic lifting capacity or 75% tipping load.
- 3. Ratings at bucket lift hook.

- 4. Lifting capacities are based on machine standing on level, firm and uniform ground.
- *Indicates the load is limited by hydraulic capacity rather than tipping capacity.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine and rules for the safe operation of equipment should be adhered to at

LIFTING CAPACITY (IMPERIAL)

9035EZTS with 12" Shoes, 4'4" Arm (Standard)

- Reach from swing center Bucket hook height

- A: heach from the B: Bucket hook height C: Lifting capacity Cf: Rating over front Cs: Rating over side

Conditions

Boom length:8' one-piece boom Arm length: 4'4" Bucket: 0.14 yd³ Shoes: 12"

Unit: Ib



Blade: Down

| Α | (Ur | it: | ft) |
|---|-----|-----|-----|
| | | | |

| | | | | • | • • | | | | | |
|--------|--------|-------|--------|----------|--------|-------|--------|-----------|--------|--|
| D (44) | 6" | 6'7" | | 7" 9'10" | | 13'1" | | MAX REACH | | |
| B (ft) | | | | | | | | | A (ft) | |
| 9'10" | | | | | *1,433 | 1,080 | *1,455 | 992 | 13'9" | |
| 6'7" | | | *1,851 | 1,719 | *1,543 | 1,058 | *1,477 | 815 | 15'2" | |
| 3'3" | | | *2,645 | 1,587 | *1,807 | 1,014 | *1,521 | 749 | 15'7" | |
| 0" | *3,813 | 2,799 | *3,064 | 1,499 | *1,984 | 970 | *1,587 | 749 | 15'1" | |
| -3'3" | *5,291 | 2,843 | *2,932 | 1,477 | *1,829 | 970 | *1,653 | 903 | 13'8" | |

| | | | | Blad | de: Up | | | | |
|--------|--------|-------|--------|-------|----------|-------|-------|-----------|--------|
| | | | | A (U | nit: ft) | | | | |
| D (#1) | 6" | 7" | 9'- | 10" | 13 | '1" | | MAX REACH | |
| B (ft) | Cf | Cs | Cf | Cs | Cf | Cs | Cf | Cs | A (ft) |
| 9'10" | | | | | 1,388 | 1,080 | 1,278 | 992 | 13'9" |
| 6'7" | | | *1,851 | 1,719 | 1,366 | 1,058 | 1,080 | 815 | 15'2" |
| 3'3" | | | 2,094 | 1,587 | 1,322 | 1,014 | 1,014 | 749 | 15'7" |
| 0" | *3,813 | 2,799 | 2,006 | 1,499 | 1,278 | 970 | 1,014 | 749 | 15'1" |
| -3'3" | *3,924 | 2,843 | 1,984 | 1,477 | 1,278 | 970 | 1,212 | 903 | 13'8" |

9035EZTS with 12" Shoes, 5'7" Arm

- Reach from swing center Bucket hook height
- Lifting capacity
- Rating over front Rating over side

Conditions

Boom length: 8' one-piece boom Arm length: 5'7" Bucket: 0.09 yd³

Shoes: 12'



Blade: Down

| A (Unit: ft) | | | | | | | | | | | |
|--------------|--------|-------|--------|-------|--------|-------|-----------|-----|--------|--|--|
| B (ft) | 6'7" | | 9'10" | | 13'1" | | MAX REACH | | | | |
| | Cf | Cs | Cf | Cs | Cf | Cs | Cf | Cs | A (ft) | | |
| 9'10" | | | | | *1,117 | 1,086 | *1,172 | 912 | 14'5" | | |
| 6'7" | | | | | *1,300 | 1,056 | *1,250 | 751 | 15'9" | | |
| 3'3" | *5,092 | 3,004 | *2,310 | 1,596 | *1,624 | 1,000 | *1,351 | 694 | 16'1" | | |
| 0" | *6,397 | 2,793 | *2,960 | 1,488 | *1,891 | 950 | *1,479 | 709 | 15'8" | | |
| -3'3" | *5,919 | 2,791 | *3,031 | 1,452 | *1,906 | 930 | *1,638 | 815 | 14'3" | | |

| Blade: Up A (Unit: ft) | | | | | | | | | | | |
|------------------------|-------|-------|-------|-------|--------|-------|--------|--------|-------|--|--|
| | | | | | | | | | | | |
| Cf | Cs | Cf | Cs | Cf | Cs | Cf | Cs | A (ft) | | | |
| 9'10" | | | | | *1,117 | 1,086 | *1,172 | 912 | 14'5" | | |
| 6'7" | | | | | *1,300 | 1,056 | 1,009 | 751 | 15'9" | | |
| 3'3" | 4,157 | 3,004 | 2,125 | 1,596 | 1,336 | 1,000 | 943 | 694 | 16'1" | | |
| 0" | 3,922 | 2,793 | 2,010 | 1,488 | 1,283 | 950 | 967 | 709 | 15'8" | | |
| -3'3" | 3,917 | 2,791 | 1,973 | 1,452 | 1,263 | 930 | 1,111 | 815 | 14'3" | | |



STANDARD EQUIPMENT

ENGINE SYSTEM

- Yanmar 3TNV88F-ESLY certified to stringent EPA Tier 4 final / EU Stage V standards.
- 3 cylinders, 4 strokes, water cooled, natural aspiration
- Engine oil filter
- Fuel system with water separator
- · Radiator, oil cooler
- Engine overheat prevention system

HYDRAULIC SYSTEM

- Main pump: one variable displacement piston pump
- Pilot pump: gear
- Pilot control: shut-off lever
- Cylinders: boom, stick, bucket, boom swing and dozer blade
- Bi-directional piping to arm
- 2-joystick with multi buttons

DIGGING EQUIPMENT

- Boom, 2,450 mm (8')
- Arm, 1,320 mm (4'4")
- 0.11 m³ (0.14 yd³) bucket (SAE, heaped)

OPERATOR STATION

- Cab
- ROPS (ISO3471:2008) Roll-Over Protective Structures
- Air conditioner, heater and defroster
- Mechanical suspension seat
- AM/FM radio with MP3 audio jack
- Glass-breaking hammer
- 12-volt cigarette lighter
- Floor mat
- Fire extinguisher
- One key for all locks and ignition
- Rear view mirrors, 1 mounted on cab left, 1 on cab inside

INSTRUMENTATION

- Gauge board with warning indicators of engine oil pressure, engine coolant, battery, hydraulic oil temperature, engine intake filter
- Service hour meter
- Fuel gauge
- · Engine water temperature gauge

ELECTRICAL

- Alternator 12 V, 55 A
- 12 V battery
- · Working lights, 2 cab mounted, 1 boom mounted
- Starting motor, 12 V, 1.7 kW (2.3 hp)

UNDERCARRIAGE

- 300 mm (12 in) rubber track,
- Rollers, bottom 4 each side, top carrier roller 1 each side
- Towing eve on base frame
- Dozer blade

GUARDS

· Cover plate under travel frame

OTHER STANDARD EQUIPMENT

- 560 kg (1,235 lbs) counterweight
- Maintenance tool kit
- Maintenance parts package

OPTIONAL EQUIPMENT

HYDRAULIC SYSTEM

- Load holding valves (1 on boom, 1 on arm and 1 on dozer)
- Quick coupler (low pressure)
- Auxiliary rotary lines

OPERATOR STATION

- Operation protection guard (Include cab front
- and top guard, bar)

 Control joysticks with 1 switch & 1 proportional

- Travel alarm (alarm during machine travel)
- caution, switch in cab)

UPPER STRUCTURE

Auxiliary counterweight

UNDERCARRIAGE

- 300 mm steel track
- 300 mm rubber track assembly (for steel
- Long arm dozer blade

DIGGING EQUIPMENT

- Arm: 1,700 mm (5'7")
 0.07 m³ (0.09 yd³) bucket (SAE, heaped)
- 0.065 m³ (0.085 yd³) bucket (SAE, heaped)





Guangxi LiuGong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China T: +86 772 388 6124 E: overseas@liugong.com www.liugong.com

Like and follow us:







The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.